


BAVARIA
vision
SERIES



Price list 1-2008

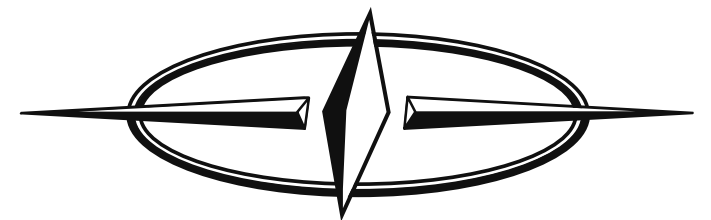

BAVARIA 40vision

BAVARIA 44vision

BAVARIA 50vision

Technical data / Images

Construction		J & J Design	J & J Design	J & J Design
Length overall		12,70 m	13,70 m	15,70 m
Length hull		11,99 m	12,99 m	14,99 m
Length waterline		10,60 m	11,55 m	13,45 m
Beam overall		3,99 m	4,39 m	4,49 m
Deep standard (lead keel)	approx.	1,75 m	1,80 m	1,90 m
Unladen weight	approx.	8.950 kg	10.400 kg	13.500 kg
Ballast	approx.	3.040 kg	3.360 kg	4.850 kg
Volvo-Penta		D2-40 / 27,9 kW / 38 hp	D2-55 / 39 kW / 53 hp	D2-75 / 53 kW / 72 hp
Fuel tank	approx.	210 l	210 l	320 l
Water tank	approx.	360 l	360 l	790 l
Cabins		2 or 3	3	3
Berths		4 or 6	6	6
Hight in salon	approx.	2,05 m	2,11 m	2,14 m
Mainsail and genoa, standard	approx.	95,80 m ²	111,20 m ²	138,00 m ²
Height of mast above water line	approx.	19,50 m	20,00 m	21,65 m

Sail and rigging

Base price ex works

List price in EURO

excl. VAT
133.600,00

excl. VAT
152.000,00

excl. VAT
198.000,00

Standard specification and optionals

DECK

List price in EURO

excl. VAT

excl. VAT

excl. VAT

Teak on cockpit seats and cockpit floor	Standard		Standard		Standard	
Teak on side deck and coach roof		7.142,86		12.596,64		14.567,23
Bow fitting with removable anchor roller	Standard		Standard		Standard	
4 cleats with fairlead, aluminium	Standard		Standard		Standard	
2 spring cleats, midships (aluminium)	Standard		Standard		Standard	
2 working winches, self-tailing, two-speed	Standard		Standard		Standard	
2 genoa winches, self-tailing, two-speed	Standard		Standard		Standard	
2 spinnaker winches, self-tailing, two-speed	Standard		Standard		Standard	
2 winch handles	Standard		Standard		Standard	
4 stainless steel cleats		697,48		697,48		697,48
Spring cleats, stainless steel (only in connection with stainless steel cleats)		394,96		394,96		394,96
Rail opening on both sides		567,23	Standard		Standard	
Electrical windlass	Standard		Standard		Standard	
Anchor chain, zinc coated, 50 m length	Ø 8 mm	289,92	Ø 10 mm	491,60	Ø 10 mm	491,60
Plough anchor, zinc coated, with lock at bow fitting and chain guard		344,54		344,54		344,54
Coaming for sprayhood	Standard		Standard		Standard	
Sprayhood		1.394,96		1.394,96		1.483,19
Cockpit table with stowage	Standard		Standard		Standard	
2 Dorade ventilators	Standard		Standard		Standard	
Electrical bilge pump; manual bilge pump	Standard		Standard		Standard	
Life-saving collar with holding device and life line		134,45		134,45		134,45
LFS-safety package, life-safety system		298,32		298,32		298,32
SAILS						
Mainsail and reefing genoa	Standard		Standard		Standard	
Rodkick with gas pressure spring		878,15		1.134,45		1.214,29
Fully battened mainsail, incl. MDS and lazyjacks; reefing genoa	(approx. 95,80 m ²)	1.781,51	(approx. 111,20 m ²)	1.844,54	(approx. 138,00 m ²)	1.920,17
High-tech sailset for battened main and reefing genoa, cut and surface optimized, sandwich/laminate cloth; battened main incl. MDS and lazyjacks, bi-radial; reefing genoa with e-foam, tri-radial	(approx. 98,80 m ²)	5.352,94	(approx. 115,10 m ²)	6.168,07	(approx. 143,00 m ²)	7.235,30
Mainsail-furling system with mainsail and reefing genoa	(approx. 88,50 m ²)	2.428,58	(approx. 103,00 m ²)	2.642,86	(approx. 130,00 m ²)	3.067,23
High-tech sailset for mainsail-furling system; furling main, EMS-system, sandwich cloth; reefing genoa with e-foam, tri-radial, cut and surface optimized	(approx. 96,40 m ²)	3.445,38	(approx. 112,30 m ²)	3.466,39	(approx. 139,00 m ²)	3.621,85
Electrical genoa winches, two-speed		6.470,59		7.201,68		7.483,19

BAVARIA 40vision

BAVARIA 44vision

BAVARIA 50vision

SAILS	<i>List price in EURO</i>	<i>excl. VAT</i>	<i>excl. VAT</i>	<i>excl. VAT</i>
Spinnaker gear complete with spinnaker boom and holding device; Downhaul with separate chain plate. Excenter cleats for halyard and topping lift, stopper for downhauls, leading blocks at mast and rail stanchions, leading blocks, Spinnaker-liftsystem		2.336,13	2.705,88	3.491,60
Gennaker boom		554,62	554,62	554,62
RIGGING				
Conventional rig	Standard		Standard	Standard
Roller reefing gear for foresail	Standard		Standard	Standard
BALLAST				
Deep keel (instead of standard)	Lead keel with antimony (draught approx. 2,10 m)	781,51	Lead keel with antimony (draught approx. 2,10 m) 865,55	Cast iron-keel with antimony, two-piece (draught approx. 2,30 m) 1.563,03
RUDDER				
2 steering pedestals, 2 steering wheels with leather cover	Standard		Standard	Standard
Pedestal for instruments at the cockpit	Standard		Standard	Standard
ELECTRICAL SYSTEM				
Engine circuit 1 x 55 Ah / B50 88 Ah, boat circuit 1 x 140 Ah	Standard		Standard	Standard
AC-shore supply with battery charger, 25 Ah	Standard		Standard	Standard
AC-socket at switch board, galley and marine head	Standard		Standard	Standard
DC-socket at switch board	Standard		Standard	Standard
Additional battery, 140 Ah		281,51	281,51	281,51
Battery charger, 45 Ah (instead of 25 Ah), for AC-shore supply		256,30	256,30	256,30
Bow thruster SE 80, electrical, only in connection with additional battery		5.159,66	5.159,66	5.159,66
Diesel-generator 4,5 kVA/3,8 kW	-		9.865,55	9.865,55
INTERIOR				
Cooker with oven, half-cardanic	Standard		Standard	Standard
Insulated cooling box with electrical refrigeration unit DC	Standard		Standard	Standard
Refrigerator, 80 l	Standard		Standard	Standard
Stereo-Radio (FM, MW, LW), mit CD-/MP3-player, speakers in salon		491,60	491,60	491,60
2 big deck salon windows with high quality shades	Standard		Standard	Standard
2 panorama windows in the salon	Standard		Standard	Standard
Hot-air heating, Webasto Air Top 5000, fuel supply from engine diesel tank		2.764,71	2.764,71	2.764,71
FRESH WATER SUPPLY				
Cockpit shower, cold and warm water	Standard		Standard	Standard
Warm water supply from engine-cooling circuit and AC-shore supply	Standard		Standard	Standard
Shower/s in marine head/s	Standard		Standard	Standard
Pump toilet/s with holding tank/s, disposal via seacock and deck suction	Standard		Standard	Standard
NAVIGATION				
Raymarine Tridata ST 60 Plus (log, speed and echo sounder)	Standard		Standard	Standard
Wind gauge; compass	Standard		Standard	Standard
Autopilot, Raymarine ST 6002		3.655,46	3.655,46	3.655,46
Raychart, Raymarine C 70 with GPS, rotating control panel on cockpit table		2.394,96	2.394,96	2.394,96
VHF cabling, incl. antenna, installed in mast to chart table		281,51	281,51	281,51
MOTORANLAGE				
Volvo-Penta with sail drive and fixed propeller	D2-40 Standard		D2-55 Standard	D2-75 Standard
Volvo-Penta with sail drive and fixed propeller	D2-55, 39 kW / 53 hp	1.252,10	D2-75, 53 kW / 72 hp 4.474,79	-
Folding propeller	3-blade	1.731,09	1.731,09	-
	4-blade only in connection with D2-75	-	2.710,08	2.710,08
Cradle for sea transport		1.651,26	1.756,30	1.756,30

All prices are in EURO, ex works Giebelstadt.
All weights and measurements are calculations based upon construction documents. Bavaria deploys the Seaway Group d.o.o./ J & J Design for design and construction of its manufactured and distributed yachts.

The brochure is intended for advertisement only and is not part of a contract, warranty or of an offer. We reserve the right to modify or improve our products and to change specifications without notice.

We are not liable for errors and printing mistakes. The expense of rigging out and launching is to be invoiced individually and separately.


All rights are reserved to execute alterations in construction and equipment without notice.

Aforementioned prices are recommended sales prices for deliveries ex works within four months of order placement. Later deliveries are subject to invoicing according to the then valid price list.

Valid for orders from January 1st 2008



Powered by
**VOLVO
PENTA**

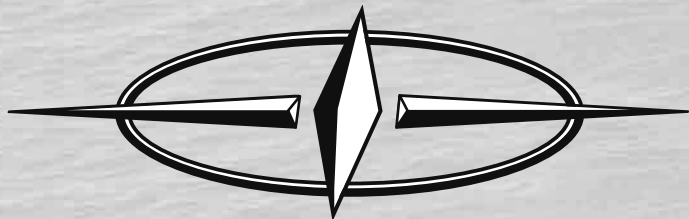

BAVARIA YACHTBAU GmbH

D - 97232 Giebelstadt – Bavariastr. 1 – Phone +49 (0) 93 34 / 94 2-0 – Fax +49 (0) 93 34 / 94 2-116

e-mail: info@bavaria-yachtbau.com – <http://www.bavaria-yachtbau.com> 1-2008-1 – 12/07 – team-nestmeier@t-online.de